

M12 Circular Connector



Dual M12 Female to Male Straight 4 Pin Connector with SS knurling

Product Image



Product may differ from image.

General Specification

Rated Operational Voltage	250 V
Current Rating	4A
Insulation Resistance	$\geq 100 \text{ M}\Omega$
Temperature Range	$-25^{\circ}\text{C} \dots +75^{\circ}\text{C}$
Tightening Torque	0.6 Nm
Degree of Protection	IP67
Coding	A-Coded


Material Specification

Grip Material	PU
Contact	Cu-Zn
Contact Plating	Gold Flash
Contact Carrier	Nylon 66
O-Ring	Neoprene
Grip Colour	Black
Coupling Nut	Stainless Steel

Cable Specification


Cable Length-L	2 m
Cable Type	3 Core PUR Multi Strand
Sheath Colour	Black
Cross Section of Wire	0.34 sq. mm
Core Dia	1.4 mm
Cable Dia	$4.5 \pm 0.1 \text{ mm}$
Termination	Partially Stripped

Product Diagram

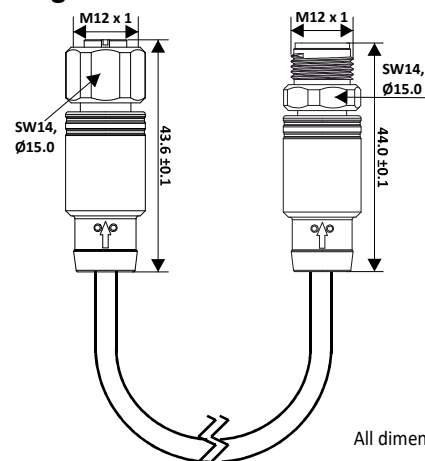

All dimensions are in mm.

Pin Assignment

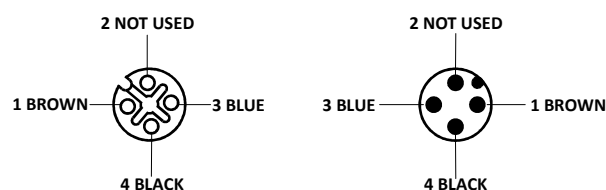

Specification & Approval

RoHS	Compliant with Exemption
RoHS exemption	6⑥: Copper alloy containing up to 4 % lead by weight
REACH SVHC substances	Yes
REACH SVHC substances	CAS 7439-92-1 (Lead)
CE	Yes
Standard	IEC 61076-2-101

Ordering Part No.

Cable Length	Part Number
2 m	CDF12S4-M12S3-02BUSS
3 m	CDF12S4-M12S3-03BUSS
5 m	CDF12S4-M12S3-05BUSS
10 m	CDF12S4-M12S3-10BUSS
15 m	CDF12S4-M12S3-15BUSS

*Please contact factory for customized cable lengths.

